

# HOFMANN®



***Two-Post***


**Automotive Lift Equipment**

# HOFMANN 10K 2-POST LIFTS


## Models: DLA10VB (asymmetric) DLS10VB (symmetric)




- 10,000 lb. capacity - symmetric or asymmetric models - 144" ceiling height
- One piece 10 angle roll-formed columns for more strength in a smaller profile
- Powerpack can be mounted on either driver or passenger side for installation flexibility
- Ultra high molecular polyethylene "dura-glide" slide blocks for smooth carriage operation
- Full length arm pin sleeves and nickel/zinc plated pins for more strength and longer arm life
- 3" steel cable pulleys with oil impregnated iron bushing contribute to low maintenance
- Dual function micro-switch:
  - Activates vehicle height safety rod
  - Limits cylinder stroke to prevent hydraulic seal stress
- Mechanical safety locks at 16 operating positions for more safety
- Single point safety lock release and two hand lift lowering contribute to safe operation

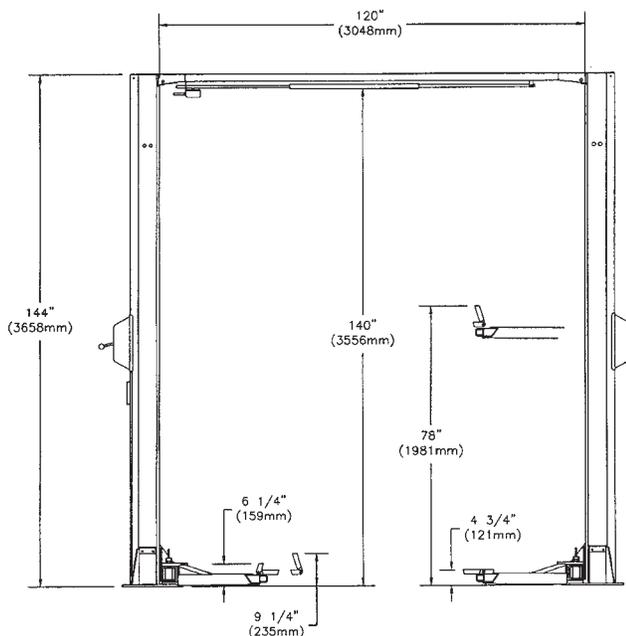

Front View

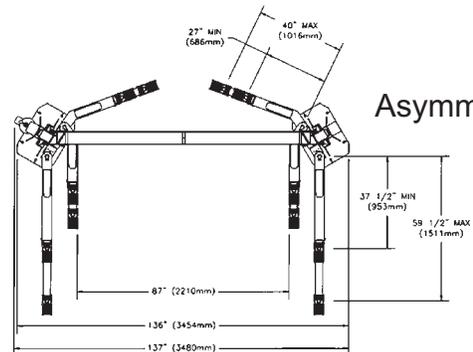

Asymmetric

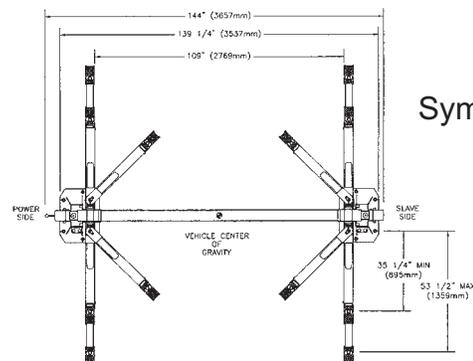


Symmetric

# HOFMANN 12K 2-POST LIFTS




## Models: DLS12012 (symmetric) DLS12014 (symmetric)

- 12,000 lb. (5,443 kg.) overhead beam clear floor symmetric 12 ft. or 14 ft. ceiling height
- Large one piece 10 vector angle roll-formed columns for more strength
- Ultra high molecular polyethylene "dura-glide" system for smooth carriage operation
- Steel cable pulleys with oil impregnated iron bushings for durability and low maintenance
- Spherically grooved greasable arm pin sleeves and nickel/zinc plated arm pins for longer life
- Bolt-on Heavy duty cassette style arm restraints for long term serviceability
- Dual function microswitch limits cylinder stroke ~ activates height safety rod
- Mechanical safety locks at 16 positions with *single point release* and two hand down operation
- Versatile stackable pad lift system
- Two position (12" or 24") bolt-on height extension kit available (#080) for both 12 ft. and 14 ft. models.

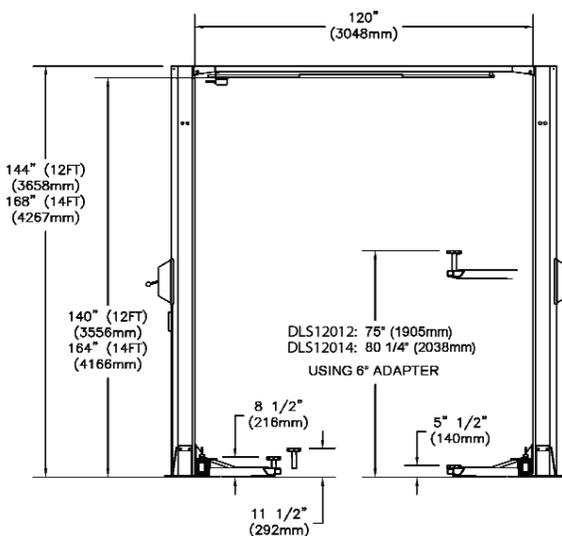

Front View

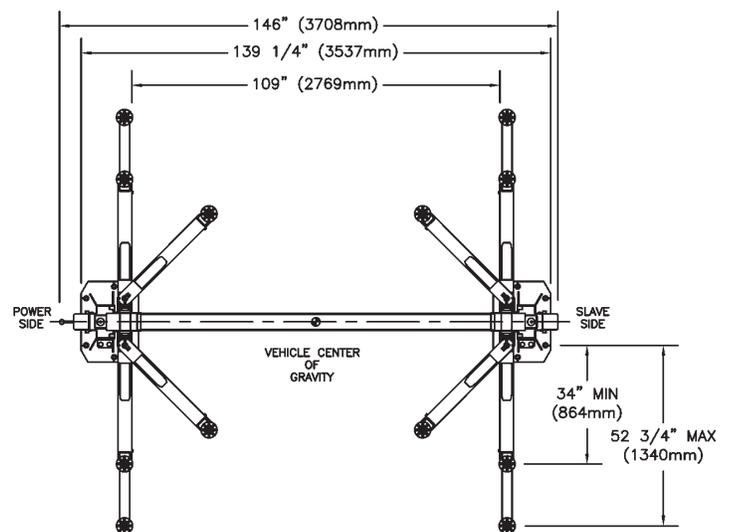


Top View

# HOFMANN 15K 2-POST LIFTS

## Model: DLS15016 (symmetric)

- 15,000 lb. (6,800 kg) capacity
- Overhead beam clear floor symmetric design - 16.1 ft. (4,902 mm) ceiling height adjustable if required on installation down to 14.5 ft. (4,394 mm) for specific applications
- Large profile one piece column construction for more strength and rugged durability
- Dual cylinder direct drive lift system
- Ultra high molecular weight polyethylene carriage slide bearings (8 per column)
- Dual 3/8" (9.5 mm) pre-stressed equalizing cables
- Single point pneumatic safety lock release (**locks automatically re-engage when palm button is released**)
- Cable activated overhead safety limit switch
- Heavy duty threaded rod arm restraints engage when lift is raised
- Low profile telescoping arms with 3 sets of adjustable spindle pads (includes 5" (13 mm) and 10" (25 mm) extensions. Optional low lift rubber pad adapters available - #075)

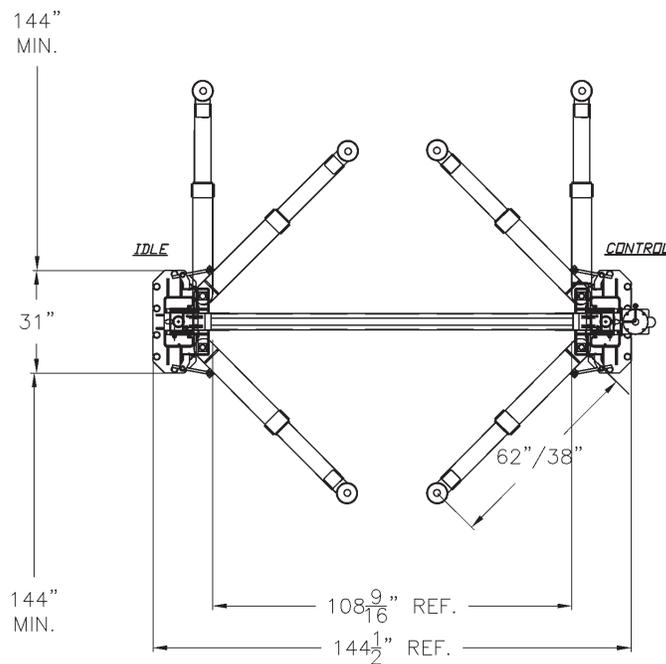

Top View

## FEATURES

### HEAVY DUTY CONSTRUCTION FOR INCREASED SAFETY



#### Roll Formed Column

- Ultra high molecular polyethylene glide blocks
- Smoother gliding operation
- Increased carriage stability



#### Greasable Spherically Grooved Arm Pin Collar

- Nickel zinc plated arm pin
- No Arm Sag
- Longer Arm Life



#### Bolt-on Gear-cut Cassette Style Arm Restraints

- Increased arm stability
- Easy to replace if damaged

### COMPLETE VERSATILITY



Model DLA10VB



## OPTIONAL ACCESSORIES



#### Model 028 Poly Pads & Model 033 Truck Adapters

Both accessories are optional with all flip pad style 2-post lifts.



#### Model 049 Steel Stack Pad Adapter

Optional for all stack pad style 2-post lifts.

*\*Note - Optional Accessories may be model specific. Consult your Hofmann Sales Representative for details.*

# HOFMANN®



## Hofmann 2-Post Lifts

### SPECIFICATIONS

| MODEL                                  | DLA10VB<br>Asymmetric        | DLS10VB<br>Symmetric         | DLS12012<br>Symmetric        | DLS12014<br>Symmetric        | DLS15016<br>Symmetric Only                                 |
|--|------------------------------|------------------------------|------------------------------|------------------------------|--|
| CAPACITY                               | 10,000 lbs.<br>4,545 kg.     | 10,000 lbs.<br>4,545 kg.     | 12,000 lbs.<br>5,443 kg.     | 12,000 lbs.<br>5,443 kg.     | 15,000 lbs.<br>6,800 kg.                                   |
| OVERALL WIDTH                          | 137"<br>3,493 mm.            | 144"<br>3,658 mm.            | 146"<br>3,708 mm.            | 146"<br>3,708 mm.            | 144 1/2"<br>3,670 mm.                                      |
| OVERALL HEIGHT                         | 144"<br>3,658 mm.            | 144"<br>3,658 mm.            | 144"<br>3,657 mm.            | 168"<br>4,267 mm.            | 193"<br>4,902 mm.<br>Field adjustable to 173"<br>4,394 mm. |
| WIDTH BETWEEN COLUMNS                  | 107"<br>2,718 mm.            | 120"<br>3,048 mm.            | 120"<br>3,048 mm.            | 120"<br>3,048 mm.            | 120"<br>3,048 mm.  |
| MAXIMUM LIFTING HEIGHT (with adapters) | 78"<br>1,981 mm.             | 78"<br>1,981 mm.             | 75"<br>1,905 mm.             | 80 1/4"<br>2,038 mm.         | 85"<br>2,159 mm.   |
| UNDER BAR CLEARANCE                    | 140"<br>3,556 mm.            | 140"<br>3,556 mm.            | 140"<br>3,556 mm.            | 164"<br>4,165 mm.            | 186"<br>4,724 mm.  |
| DRIVE THROUGH WIDTH                    | 87"<br>2,210 mm.             | 109"<br>2,769 mm.            | 109"<br>2,769 mm.            | 109"<br>2,769 mm.            | 108 1/2"<br>2,756 mm.                                      |
| SHIPPING WEIGHT                        | 1,410 lbs.<br>640 kg.        | 1,410 lbs.<br>640 kg.        | 1,565 lbs.<br>710 kg.        | 1,625 lbs.<br>737 kg.        | 3,350 lbs.<br>1,520 kg.                                    |
| LIFTING TIME                           | 45 sec.                      | 45 sec.                      | 60 sec.                      | 60 sec.                      | 70 sec.  |
| STANDARD POWER REQUIREMENTS            | 230V/1Ph/20Amp<br>60Hz/20Amp | 230V/1Ph/20Amp<br>60Hz/20Amp | 230V/1Ph/20Amp<br>60Hz/20Amp | 230V/1Ph/20Amp<br>60Hz/20Amp | 230V/1Ph/20Amp<br>60Hz/20Amp                               |

## HOFMANN® USA



309 Exchange Avenue • Conway, AR 72032  
(800) 251-4500 • (501) 450-1581  
Fax (501) 450-2085 • [www.hofmann-usa.com](http://www.hofmann-usa.com)

## HOFMANN® Canada



6500 Millcreek Drive • Mississauga, ONT L5N 4G4  
(800) 267-2185 • (866) 812-5316  
Fax (905) 821-2073 • [www.hofmann.ca](http://www.hofmann.ca)  
E-mail: [info@hofmann.ca](mailto:info@hofmann.ca)